

ORDER PICKERS JOEY ZERO ELECTRIC ACCESS VEHICLE

JOEY ZERO ELECTRIC ACCESS VEHICLE

Boost productivity + people safety by replacing ladders with maintenance free smart lithium-ion battery



ORDER PICKERS

JOEY ZERO

ELECTRIC ACCESS VEHICLE

STANDARD EQUIPMENT

- MAINTENANCE FREE LITHIUM-ION BATTERY
- Integral 24v battery and 240v Charger
- Powered front load tray
- Electronic power steering
- Forward facing blue light
- Rear flashing warning light
- Battery discharge indicator w/hour meter
- Accessory bars and file pouch
- Cushioned floor and mast cap
- Coperator Controls: Key switch, horn, emergency power-disconnect, slope alarm, stability tabs

OPTIONAL EQUIPMENT

- Audible back-up or travel alarm
- Plexiglass insert for front load tray
- Rail guidance



PERMANENT MAGNET DRIVE MOTOR

Lithium-ion battery ensures that PMDC motor delivers long run times of continuous operation on a single charge through a Zapi 24v infinitely variable travel controller. Travel speeds are automatically reduced when elevated or tightly turning.

HYDRAULIC PUMP & RESERVOIR

The hydraulic pump and reservoir are enclosed in the powerhead, reducing risk of leakage when used. The lowering valve is located on the chassis should the unit ever become stuck in the air.

OPERATOR CONTROLS

The unit's RH side controls feature fingertip lift/lower buttons for the operator platform, front load tray, horn, and travel, and a recessed emergency disconnect button. The LH controls include the steering tiller, battery discharge indicator with hour meter and key switch.

PERFORMANCE SPECIFICATIONS

CAPACITY:

340kg Combined 91kg front load tray 113kg front load deck

136kg Operator compartment

ACCESS HEIGHT

3000mm platform height allows the operator to handle goods at approx. 4800mm height.

TYRES/WHEELS

The front drive wheels include electro-mechanical brake. Two front-mounted polyurethane caster wheels boost stability.

Drive tire: \$\pi\$ 210x70 polyurethane

Rear tires: \$\pi\$ 250x100 non-marking rubber.

FRONT LOAD TRAY

Dimensions: 737mm x 533mm

PERFORMANCE AND SATISFACTION

OPERATOR COMPARTMENT

The 610mm x 610mm cabin is fully enclosed by an auto-locking rear entry gate. Safety features include a foot switch and right-hand sensor. A low, 279mm step, 1067mm high railings, coloured side panels and presence sensors (lower chassis) maximise safety. Cushioned cabin floor, gates, and mast cap lift operator comfort.

FRONT LOAD DECK

The 737mm x 533mm front load deck features a 1- piece rubber powerhead cover that can be removed with simple hand tools to access unit's systems for easy maintenance.

PRODUCTIVITY BOOST

The convenience and comfort of Joey Zero adds productivity to warehouse, retail, and other operations, making elevated tasks safe for order picking, shelf stocking or stock management.



FRONT LOAD TRAY



OPERATOR CONTROLS

CHASSIS: COMPACT INNOVATION

An all-steel chassis provides stability at height when loaded, and exceptional durability. The front blue light and rear flashing warning light are included for maximum safety. Chassis does not elevate.

STANDARD SMART LI-ION BATTERY.


ISS Equipment is committed to clean electric power. All our Big Joe forklifts come standard with LIST, Lithium Integrated Smart Truck technology for higher performance and clean air for people and products.






L 134 234

issequipment.com.au

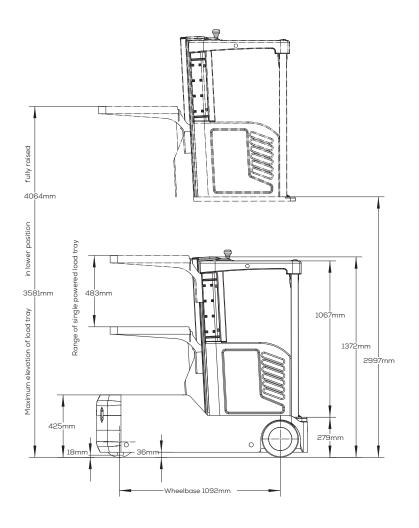

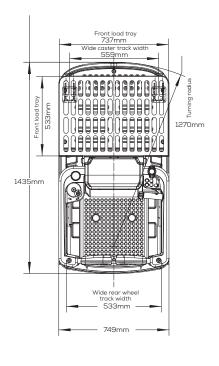

All measurements shown are maximum elevations in standard "millimeter" units.

| Model | Equipment type | Mast | Operator platform | Front load tray | Collapsed Height | Extended Height | Weight* (kg) |
|---|----------------|-------------|-------------------|-----------------|---------------------|--------------------|--------------|
| 340kg total vehicle capacity (91kg front load tray, 113kg front load deck, 136kg operators compartment) | | | | | | | |
| J0-118 | Access Vehicle | Three Stage | 2997 | 4064 | 1372 | 4089 | 839 |

^{*} Estimated shipping weight with battery

